


DOME-80R



Surface Mounted LEDt



Surface Mounted LED



- ✔ 3W Max
- ✔ IP67 for wet locations
- ✔ 50,000 hour lifetime
- ✔ CNC processed Aluminum housing
- ✔ 500Kg walkover
- ✔ Installation accessories supplied



SPECIFICATIONS

Power	1 LED x 3W (700mA)
Light Color	White: Warm, Neutral, Cool Color: Red, Green, Blue, Amber
White light CCT	3,000K 4,000K 6,000K
Lumen Output ¹	160lm 210lm 260lm
White light CRI ²	≥80 - Standard ≥90
Beam	5°, 15°, 25°, 45°
Optics	20mm lens


Diameter	ø80
Installation cut off	ø48mm (without concrete box)
Height	27mm (without cable)
Weight	220g

Housing	Aluminum
Housing color	Natural anodize coating
IP Rating	Wet locations - IP67
Operating Temp.	-20°C to 40°C
Cable	50cm Neoprene cable - Standard
Connectors	Open Wires
Accessories	B-47 - Concrete box (ø50.5mm x 80mm)


Extras	
Cable	Custom cable length up to 50m
Power Supply	Constant Current
Control	On/Off 0-10V Triac DMX DALI

DRAWINGS

TOP



SIDE

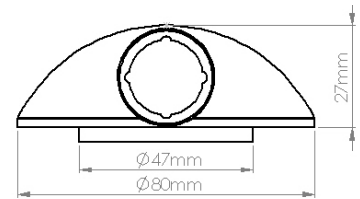

Notes:

- 1 LEDs have ±10% output tolerance in accordance to manufacturer specifications
- 2 CRI 90 version is available upon request only
- 3 Extras are not supplied by default and priced separately