


IG-93-73R-NR




InGround LED Spot



Inground LED spot



- ✔ 3W Max
- ✔ IP68 for wet locations
- ✔ 50,000 hour lifetime
- ✔ CNC Stainless steel housing
- ✔ 500Kg walkover
- ✔ Installation accessories supplied

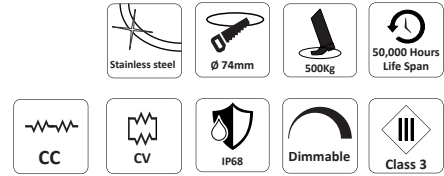

SPECIFICATIONS

Power	1 LED x 3W (700mA)
Light Color	White: Warm, Neutral, Cool Color: Red, Green, Blue, Amber, RGB
White light CCT	3,000K 4,000K 6,000K
Lumen Output ¹	540lm 540lm 630lm
White light CRI ²	≥80 - Standard ≥90
Beam	5°, 15°, 25°, 45°, Wide (frosted)
Optics	20mm Optics Clear or frosted cover

Diameter	ø96
Installation cut off	ø48mm (without concrete box)
Height	74mm (without cable)
Weight	310g


Housing	Stainless steel, tempered crystal glass cover
Housing color	Natural steel with passivation
IP Rating	Wet locations - IP68
Operating Temp.	-20°C to 40°C
Cable	100cm Neoprene cable - Standard
Connectors	Open Wires
Accessories	B-73 - Concrete box (ø76.5 mm x 80mm)

Extras


Cable	Custom cable length up to 50m
Power Supply	Constant Current
Control	On/Off 0-10V Triac DMX DALI

DRAWINGS

TOP



SIDE



Notes:

- 1 LEDs have ±10% output tolerance in accordance to manufacturer specifications
- 2 CRI 90 version is available upon request only
- 3 Extras are not supplied by default and priced separately