

LedDesign


Led Lighting Solutions LTD

info@led-design.co.il
www.led-design.co.il



NR-75-33Q

Recessed wall luminaire, providing high performance in a low glare. Suitable for interior and exterior use.

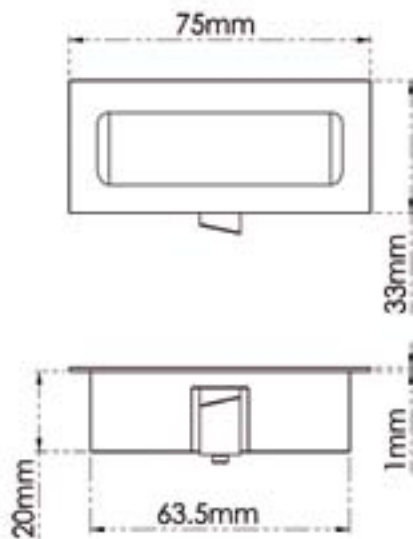

SPECIFICATIONS

Power	1 x 1watt
Current	350mA Constant current
Electric Connection	Series Connection
Driver (not included)	Led Driver 350mA
Material	Aluminum 6061 CNC processed
Surface Coating	Neutral Anodize Coating
Cable	Red (+) & Black (-) 30cm wire
IP Rating	IP67
Weight	80g
Accessories	Housing Box P/N : B-7533

IP67



Code	Model	Led Colour	Optics	Glass	Body color	Supply
LU	332	1 Warm White 2 Cold White	1 Wide		N Natural P Optional color paint Specify RAL Details on page 92	C Constant Current