


PR-10/06 PR-07/09
Linear profile

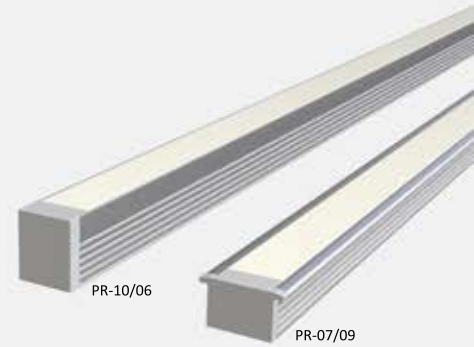


SPECIFICATION

Power	9.6w/m.
Light source	Edison 3528 flexible SMD strip, CRI 80 or CRI 90, 75LM/w, 1 Led line.
Voltage	24 VDC .
Material	Extruded matte aluminum.
Cover	Opal frosted PMMA
Surface Coating	Natural anodized (paint optionality).
Cable	2 Wires red and black.
IP Rating	IP20 / IP54.
Weight/m	150g/m.

Linear profile

Aluminum profile with opal cover for indoor and outdoor applications. Can be installed in cabinets, home, buildings and more. In this model individual LEDs aren't discernible.

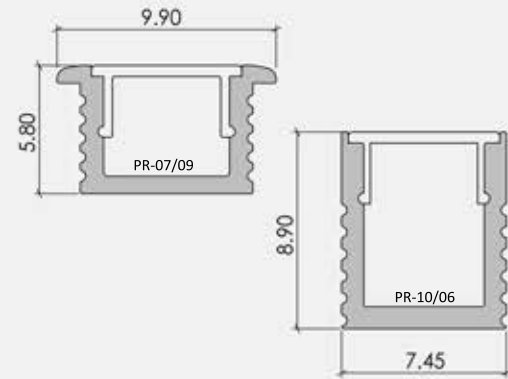

Unit: mm

Led power	CCT(K)	Led output	Luminaire output [opal cover]	Beam
9.6W/M	3000K	720LM/M	540LM/M	120
9.6W/M	4000K	780LM/M	585LM/M	120
9.6W/M	6000K	840LM/M	630LM/M	120

PR-1006-[K]-[I]-[XXXX]
PR-0709-[K]-[I]-[XXXX]

- [K] Led colour**
- 1 ● Warm white.
 - 2 ○ Natural white.
 - 3 ○ Cold white.
- [I] IP rating**
- 5 54
 - 2 20
- [X] Length [mm]**
- Up to 3000mm from 100mm.

