

PL-166-66R-NR



Under Water LED Fixture
















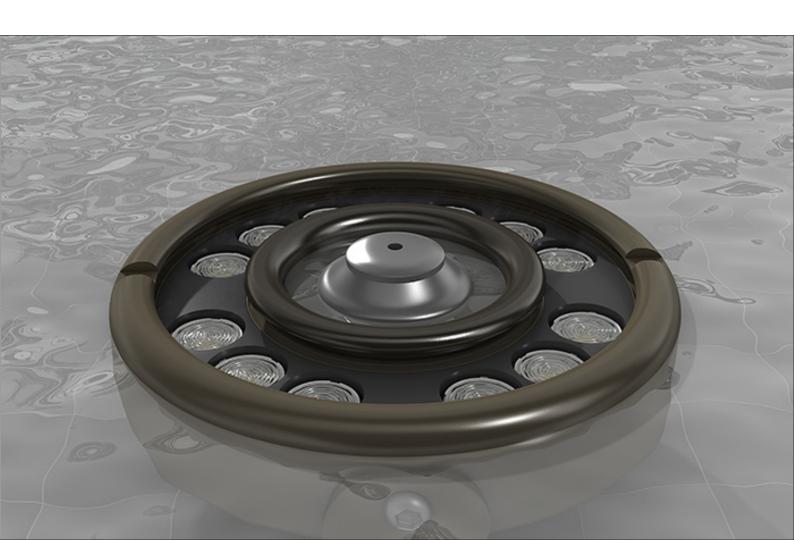

Under Water LED Fixture



- 36W Max
- Under Water IP68
- 50,000 hour lifetime
- ♥ CNC Processed stainless steel
- ✓ Installation accessories supplied















SPECIFICATIONS

| Power | 12 LED x 3W (700mA) |
|------------------------------|---|
| Light Color | White: Warm, Neutral, Cool Color: Red, Green, Blue, Amber, RGB |
| White light CCT | 3,000K 4,000K 6,000K |
| Lumen Output ¹ | 2,640lm 2,640lm 3,120lm |
| White light CRI ² | ≥80 - Standard ≥90 |
| Beam | 5°, 15°, 25°, 45° |
| Optics | 20mm Optics Clear or frosted cover |

| Diameter | ø166mm (66mm diameter hole for nozzle) |
|----------|--|
| Brackets | 78mm |
| Height | 65mm (With brackets) |
| Weight | 1,060g |

| Housing | Stainless steel, PMMA cover |
|-----------------|--------------------------------|
| Housing color | Natural steel with passivation |
| IP Rating | Under Water - IP68 |
| Operating Temp. | -20°C to 40°C |
| Cable | 300cm Neoprene cable |
| Connectors | Open Wires |

Extras


| Cable | Custom cable length up to 50m |
|--------------|-------------------------------------|
| Power Supply | Constant Current Constant voltage |
| Control | On/Off 0-10V Triac DMX DALI |

Notes:

- 1~ LEDs have $\pm 10\%$ output tolerance in accordance to manufacturer specifications
- 2 CRI 90 version is available upon request only
- 3 Extras are not supplied by default and priced separately

DRAWINGS

TOP



SIDE

