



NR-50-50Q



Wall Recessed LED Fixture

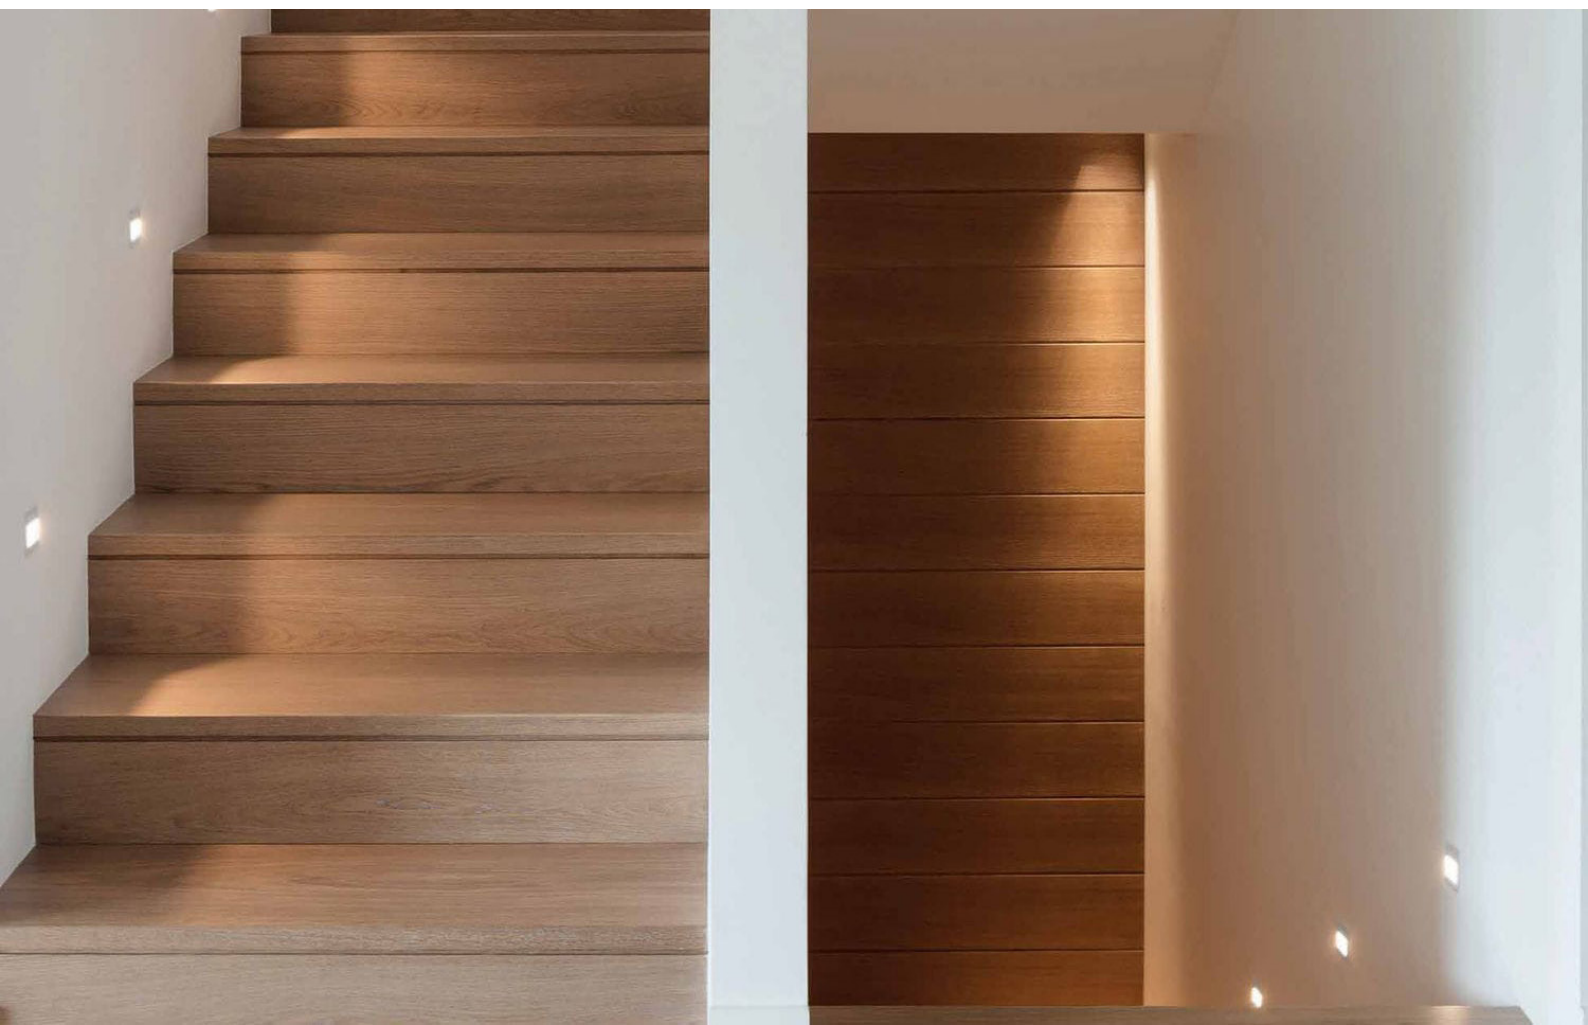

Wall recessed LED fixture



- ✔ 1W Max
- ✔ IP67 for wet locations
- ✔ 50,000 hour lifetime
- ✔ CNC processed Aluminum housing



SPECIFICATIONS

Power	1 LED x 1W (350mA)
Light Color	White: Warm, Neutral, Cool Color: Red, Green, Blue, Amber
White light CCT	3,000K 4,000K 6,000K
Lumen Output ¹	140lm 140lm 160lm
White light CRI ²	≥80 - Standard ≥90
Beam	Wide
Optics	Reflector

Dimensions	50mm x 50mm
Installation cut off	38mm x 38mm (without concrete box)
Height	27mm (without cable)
Weight	78g

Housing	Aluminum, tempered crystal glass cover
Housing color	Natural anodize coating
IP Rating	Wet locations - IP67
Operating Temp.	-20°C to 40°C
Cable	30cm, 2 wire cable - Standard
Connectors	Open Wires
Accessories	B-5050 - concrete box (44mm x 44mm x 70mm)

Extras


Power Supply	Constant Current
Control	On/Off 0-10V Triac DMX DALI

Notes:

- 1 LEDs have ±10% output tolerance in accordance to manufacturer specifications
- 2 CRI 90 version is available upon request only
- 3 Extras are not supplied by default and priced separately

DRAWINGS

TOP

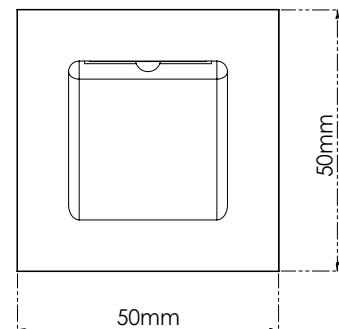

SIDE

